

# MANUAL OF CAMERA

## Features:

Wireless transmission and reception, Small size, Light weight, Low power consumption, High sensitivity, Easy to install & operate, Easy to conceat.

## Operation instructions:

- 1、 Twist the receiver antenna into the receiver;
- 2、 Connect the receiver to the monitor with AV cable;
- 3、 Plug the DC 9V 500MA adaptor into the power jack of the receiver;
- 4、 Insert the DC 8V 200MA adaptor into the power jack of the camera;
- 5、 Adjust the frequency controller on the receiver to the required position;
- 6、 Adjust the lens of the camera to best position, Mount the camera with the screw.

## Function:

Suitable for facilities in the supermarket, shop, department store, clothes shop, workshop, warehouse, school, office and home.

## Important:

The person who uses this product to peep, shoot and undertake other illegal activities, will be punished.

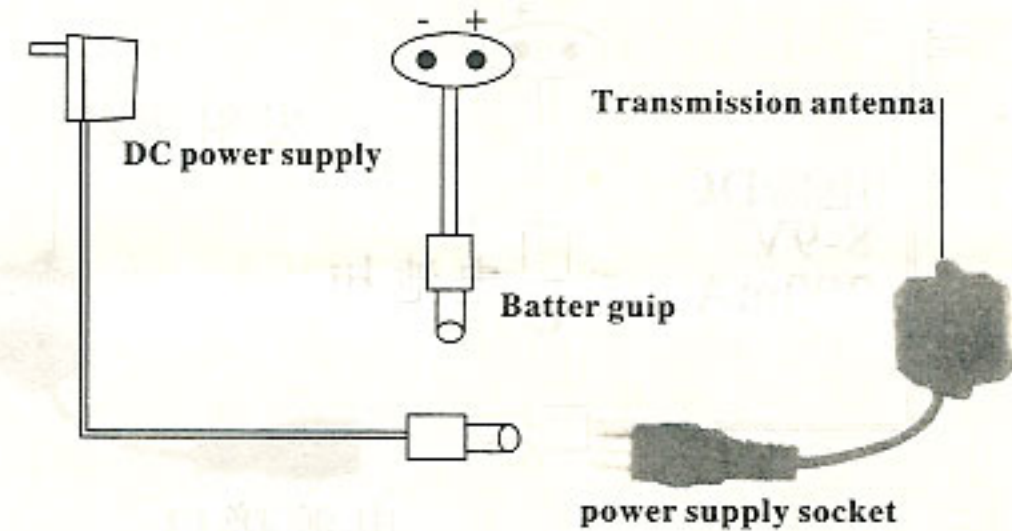
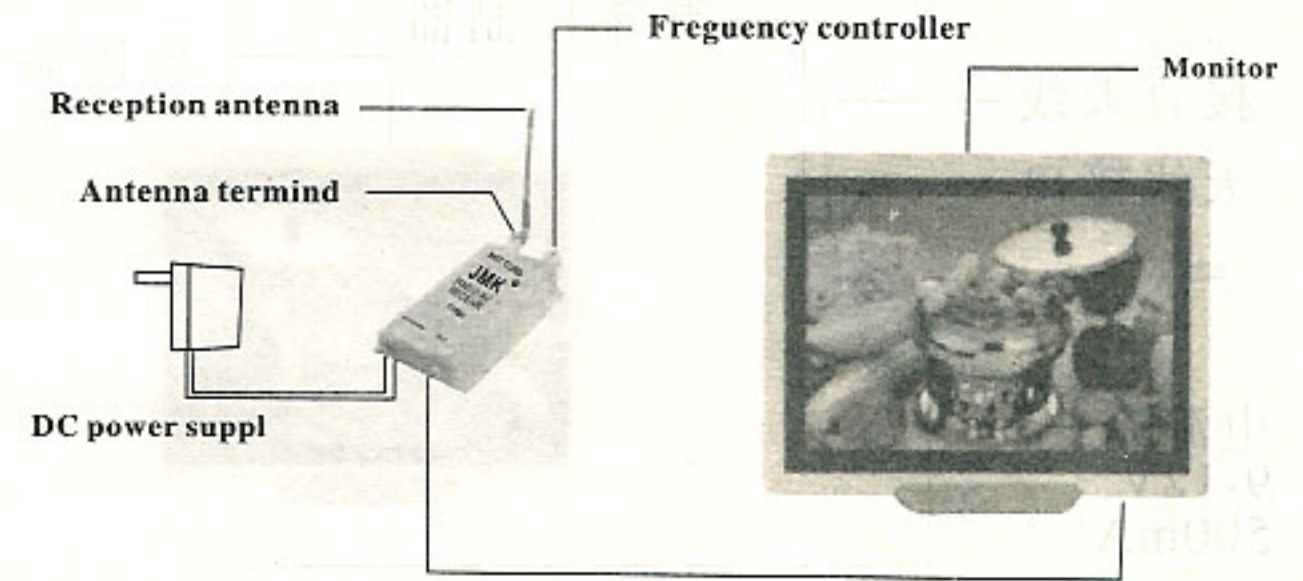


Image pickup device	1/3、 1/4
TV system	PLA/CCIR NTSC/EIA
Resolution	380TV lines
scan frequency	PLA/CCIR: 50Hz NTSC/EIA: 60Hz
minimum illumination	3LUX
output power	50mW、 200mW
output frequency	900MHz~1200MHz
power supply	DC+6~12V