


WIDE SCREEN COLOR LCD TV OPERATION MANUAL

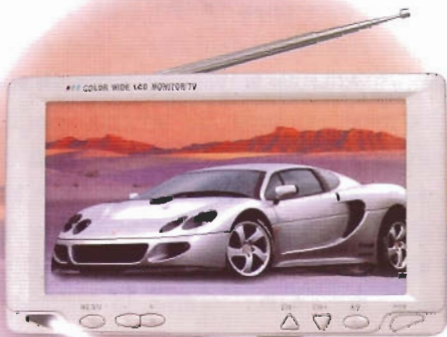

DEAR CUSTOMERS:

Thank you for purchasing the full-channel liquid crystal TV.

This product employs new integrate circuits, high quality TFT LCD modules. It is putting out with its low power consumption, stable quality, without X-ray radiation and other advantage characteristics. This product is shaped with modern style and is easy to be carried with.

The color LCD TV set is the most suitable display for cable monitor system, car VCD and GPS system for motorcars and ships.

We hope that you will have the enjoyment of your new mini color TV set.

To insure the best use of the unit, please read this handbook carefully beforehand.

IMPORTANT SAFEGUARDS AND PRECAUTIONS

1. Do not remove the rear panel of this product. If in need of service please call a qualified technician.
2. Do not insert or drop metallic objects into the case through the air vents, for it may cause serious damages.
3. Do not expose this product directly to sunlight, dust, heat sources or humid conditions.
4. Keep off strong light while using this product so as to obtain the clearest and the most colorful picture.
5. Do not seriously impact or drop onto the ground.
6. While plugging the power cord into a socket be sure to keep the power switch at OFF position.
7. If you do not want to use this product for a long time, unplug the power cord and the antenna cable as a safety precaution.

MAIN CHARACTERISTICS

MODEL	318GL-70TV
DISP SCREEN	TFT 177mm(7.0") 336960 PIXELS
RECEIVE CHANNEL	VHF.UHF, CATV
COLOR SYSTEM	PAL-4.43; NTSC-3.58(SECAM OPTIONAL)
AUDIO OUTPUT	≥ 100Mw
VIDEO INPUT	1V p-p
INPUT VOLTAGE	DC 11-13V
POWER CONSUMPTION	12 W
DIMENSION	194 × 122 × 26(mm)
WEIGHT	558g

ADDITIONAL FUNCTION:

The unit has special functions of picture up/down and left/right reversal and double A/V input. The viewing aspect ratio can be transformed from 16:9 to 4:3; The earphone jack makes private receiving possible


ACCESSORIES

Remote controller	1 piece
A/V cable	1 piece
DC12V AC. adapter	1 piece
Car power cord	1 piece
Automotive bracket	1 piece
Operation manual	1 piece


REMOTE CONTROLLING



TV OPERATION

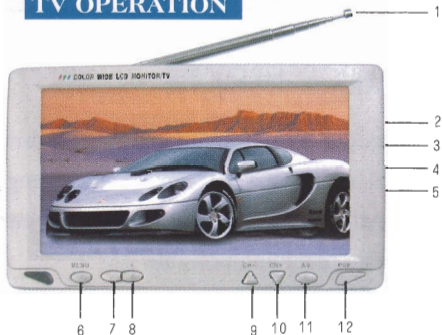

- | | | | |
|-------------|---------------|------------------|------------------|
| 1) Antenna | 2) Power plug | 3) Earphone jack | 4) Antenna jack |
| 5) A/V jack | 6) Menu | 7) VOL- | 8) VOL+ |
| 9) CH- | 10) CH+ | 11) AV | 12) Power Switch |

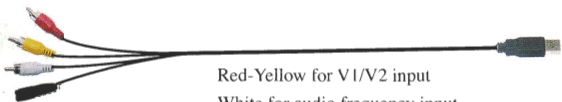

Red-Yellow for V1/V2 input
 White for audio frequency input
 Black for DC12V power source

OPERATION

1. Power:

ATTENTION, make sure the terminal electric poles of the power plug are as follows: the inner pole = "+" and the outer pole = "-".

The input voltage range from DC 11 to 13V can be used, including the DC 12V car or ship power.

2. Auto-search system and channel selection:

Initially, press the menu button "FUNC" or "MENU" to select the function of "Tuning" in the menu, press "▼/▲" for "AUTO", and then press "◀/▶". The TV set will in this way search channels automatically and store all the channels received. Afterwards, you can just push the button "▼/▲" on the panel to choose the program you like.

You may search TV programs manually by using the "◀/▶" button and push the number buttons when there is a signal and press the "◀/▶" again to set the program you like. If the local signal is poor, be sure to use "FINE" in the menu and press the "◀/▶" button to readjust it. This button can also be used for skipping repeated channels selected or poor picture of some channels. There are number buttons from "0" to "9", and with the help of "-/--" button (for numbers from "10" to "99"), you can choose zero to ninety-nine channels accordingly.

3. Audio and Picture Adjustment:

To adjust the brightness, contrast, color and volume, press the menu button "FUNC" or "MENU" and there will appear "Picture" menu in the screen. Then press the related button and "◀/▶" to choose the ideal brightness, contrast, color and volume. You can also use button "Picture" in the remote-controller to set the picture and volume.

When the unit is placed upside down, the picture will reverse to its normal direction. To make "left-right" picture reverse, just press the button "MENU", choose "X Turn" in the "FUNC" menu and push "◀/▶" button.

4. TV/AV Conversion:

When the product is connected to cable TV, it can receive the local TV programs. You can also use the antenna of the set to receive TV signals.

When the set is used in a monitor system or as a display in videodisk or videocorder system, connect the A/V input plug to the five-wire socket of the set. Then press the "A/V Conversion" button in the remote controller to select Video 1, Video 2 or TV signal.

5. Timing and Chinese/English Menu:

Press "FUNC/MENU" button, entering the "TIMER" menu list you may first fix the present time. then set the "TV On " time or "TV Off " time by pushing the "◀/▶" buttons. The set is also designed to remind you automatically

of the time set by yourself with its blue background when playing.

If you like to change to your favorite channel at prime time, press the "FUNC/MENU" button to choose "Clock" in the "Timer" menu. Press "◀/▶" button to fix starting time. Turning to "CH- TIME" in the menu, press "◀/▶" again to fix appointment time. Push the number buttons to fix the "POSITION". When the fixed time elapses, the set will automatically turn to the channel you have chosen. Select in the "FUNCTION" menu the "AUTO SHUT" and press "◀/▶" button to make the set switch off automatically when there is no TV signal.

Select in the "FUNCTION" menu the "LANGUAGE" and press "◀/▶" button to choose Chinese or English menu.

6. Perpetual Calendar:

The set has the function of perpetual calendar. Press the "CALENDAR" button in the remote controller, press "◀/▶" button to select the year or month you want and fix it by pushing "▼/▲" button. To cancel the display of perpetual calendar, just press "CALENDAR" button again.